



MaxiMill – Screw in cutter G 490-09

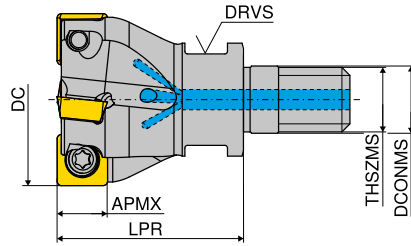



Designation	DC	ZNF	APMX	LPR	THSZMS	DCONMS	DRVS	torque moment Nm	Insert	2B/40 Article no. 50 726 ... EUR	
G490.25.R.03-09	25	3	8	35	M12	12,5	17	3,2	SD.. 09T3..	304,20	025
G490.32.R.04-09	32	4	8	35	M16	17,0	24	3,2	SD.. 09T3..	329,90	032

MaxiMill – End milling cutter C 490-09

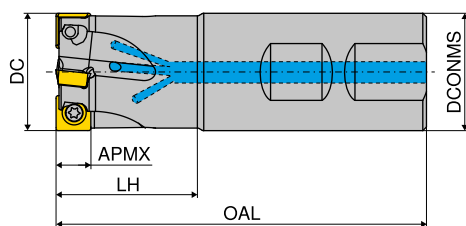

Designation	DC	ZNF	APMX	DCONMS	OAL	LH	torque moment Nm	Insert	A	B	2B/40 Article no. 50 727 ... EUR	2B/40 Article no. 50 727 ... EUR	
C490.25.R.03-09-B-32	25	3	8	25	88	32	3,2	SD.. 09T3..				304,20	025
C490.25.R.02-09-A-20	25	2	8	20	165	40	3,2	SD.. 09T3..	225		280,50		
C490.25.R.02-09-A-40-165	25	2	8	25	165	40	3,2	SD.. 09T3..	125		291,00		
C490.32.R.04-09-B-25	32	4	8	25	100	40	3,2	SD.. 09T3..				317,90	132
C490.32.R.04-09-B-40	32	4	8	32	100	40	3,2	SD.. 09T3..				329,90	032

MaxiMill – Shell mill A 490-09





Designation	DC	ZNF	APMX	DHUB	DCONMS _{H6}	OAL	torque moment Nm	Insert	2B/40 Article no. 50 728 ... EUR	
A490.40.R.05-09	40	5	8	38	16	40	3,2	SD.. 09T3..	368,80	040
A490.42.R.06-09	42	6	8	38	16	40	3,2	SD.. 09T3..	394,50	042
A490.50.R.06-09	50	6	8	43	22	40	3,2	SD.. 09T3..	407,50	050
A490.52.R.07-09	52	7	8	43	22	40	3,2	SD.. 09T3..	433,30	052
A490.63.R.07-09	63	7	8	48	22	40	3,2	SD.. 09T3..	446,30	063
A490.66.R.08-09	66	8	8	48	22	40	3,2	SD.. 09T3..	472,10	066
A490.80.R.09-09	80	9	8	58	27	50	3,2	SD.. 09T3..	627,40	080
A490.100.R.10-09	100	10	8	78	32	50	3,2	SD.. 09T3..	685,60	100
A490.160.R.14-09	160	14	8	88	40	62	3,2	SD.. 09T3..	1.013,00	160

MaxiMill – Extended flute cutter A 490K

▲ ZEFP = Number of Inserts

▲ ZNP = Number of rows




Designation	DC	ZNF	APMX	ZEFP	ZNP	OAL	DCONMS _{H6}	DHUB	torque moment Nm	Insert	2B/40 Article no. 50 761 ... EUR
A490.40.R.03K6-09	40	3	41	18	6	55	16	38	3,2	SD.. 09T3..	1.022,00 040
A490.50.R.04K6-09	50	4	41	24	6	55	22	48	3,2	SD.. 09T3..	1.237,00 050
A490.63.R.05K6-09	63	5	41	30	6	60	27	61	3,2	SD.. 09T3..	1.398,00 063

Spare parts
DC

	Y7	Y7	Y7	2A/28	2A/28	2A/28	Y7
	TORX® blade	Clamping key – T	Key D	Power Screw	Molykote	Clamping screw	Torque screwdriver
	Article no. 80 950 ... EUR	Article no. 80 397 ... EUR	Article no. 80 950 ... EUR	Article no. 70 950 ... EUR	Article no. 70 950 ... EUR	Article no. 70 950 ... EUR	Article no. 80 950 ... EUR
25 - 32	4,76 036		9,28 113		4,38 303	3,14 110	128,60 192
40 - 42	4,76 036	3,91 040	9,28 113	12,48 151	4,38 303	3,14 110	128,60 192
50 - 160	4,76 036		9,28 113		4,38 303	3,14 110	128,60 192

Adjustable single angle milling cutter C 4500

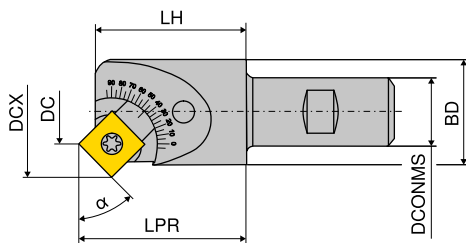


Designation	DC	DCX	ZNF	LPR	DCONMS	LH	BD	torque moment Nm	Insert	2B Article no. 50 668 ... EUR
C4500.16.R.01	3,0 - 20,8	20,3 - 23,9	1	33,0 - 35,0	16	32	18,65	3,2	SD.. 09T3..	151,00 116

Spare parts

Insert	2A	2A	Y7	Y7	2A/28	2A/28	Y7
	Cylindrical screw	Adjustment wedge	TORX® blade	Key D	Molykote	Clamping screw	Torque screwdriver
	Article no. 70 950 ... EUR	Article no. 70 950 ... EUR	Article no. 80 950 ... EUR	Article no. 80 950 ... EUR	Article no. 70 950 ... EUR	Article no. 70 950 ... EUR	Article no. 80 950 ... EUR
SD.. 09T3..	3,38 709	15,10 708	4,76 036	9,28 113	4,38 303	3,14 110	128,60 192

SDHT / SDNT

Designation	IC	D1	L	BS	S
	mm	mm	mm	mm	mm
SD.T 09T3..	9,52	4,4	9,52	2,5	3,97



SDHT / SDNT

		TCM10	-29 CTCP230	CTPP235	-29 CTPP235	-33 CTPM240	-F50 CTPM245
		CWC10	-29 DCX1230	DPX1235	-29 DPX1235	-33 DPX2240	-F50 DPX2245
			DRAGONSKIN	DRAGONSKIN	DRAGONSKIN	DRAGONSKIN	DRAGONSKIN
		CERMET SDHT	SDNT	SDNT	SDNT	SDNT	SDNT
		1B/79	1B/61	1B/61	1B/61	1B/61	1H/17
		Article no. 50 424 ...	Article no. 51 011 ...	Article no. 51 082 ...	Article no. 51 011 ...	Article no. 51 030 ...	Article no. 51 111 ...
		EUR	EUR	EUR	EUR	EUR	EUR
ISO	RE						
	mm						
09T308ER	0,8						
09T308SR	0,8	15,76 900	11,61 008	11,61 108	11,61 108	11,61 408	13,00 458
Steel		•	•	•	•	•	•
Stainless steel		•	•	•	•	•	•
Cast iron		•	•	•	•	•	•
Non ferrous metals		•	•	•	•	•	•
Heat resistant alloys		•	•	•	•	•	•
hardened materials		•	•	•	•	•	•


SDNT / SDHT

		-31 CTCK215	-27P H216T	-27P AMZ	-27 CTC5240	-M31 CTC5240	-F10 CTC5245
		-31 DCX3215	-27P CWK26	-27P AMZ	-AL HCF5240	-M31 HCF5240	
		DRAGONSKIN			DRAGONSKIN	DRAGONSKIN	DRAGONSKIN
		SDNT	SDHT	SDHT	SDHT	SDNT	SDHT
		1B/61	1A/90	1A/90	1H/D4	1H/D4	NEW 1H/D4
		Article no. 51 029 ...	Article no. 50 424 ...	Article no. 50 424 ...	Article no. 50 496 ...	Article no. 50 425 ...	Article no. 51 125 ...
		EUR	EUR	EUR	EUR	EUR	EUR
ISO	RE						
	mm						
09T308ER	0,8						
09T308FR	0,8		15,76 550	18,90 650			
09T308SR	0,8	11,61 508					21,73 55800
Steel		•	•	•	•	•	•
Stainless steel		•	•	•	•	•	•
Cast iron		•	•	•	•	•	•
Non ferrous metals		•	•	•	•	•	•
Heat resistant alloys		•	•	•	•	•	•
hardened materials		•	•	•	•	•	•

Milling guide


Machining strategy	→ 157+186	ISO Designation System	→ 194+195
Grade description	→ 209+210	Cutting data approximate values	→ 157+186
Starting Parameter	→ 157	Correction of the tooth load f_z	→ 157

MaxiMill – Screw in cutter G 490-12

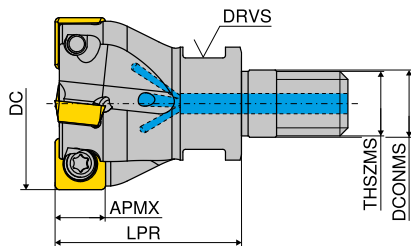



Designation	DC	ZNF	APMX	LPR	THSZMS	DCONMS	DRVS	torque moment Nm	Insert	2B/40 Article no. 50 726 ... EUR
G490.32.R.03-12	32	3	10,7	35	M16	17	24	3,2	SD.. 1205..	317,80 13200
G490.40.R.04-12	40	4	10,7	40	M16	17	24	3,2	SD.. 1205..	351,10 14000

MaxiMill – End milling cutter C 490-12

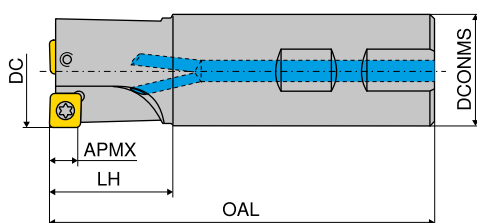

Designation	DC	ZNF	APMX	DCONMS	OAL	LH	torque moment Nm	Insert	B 2B Article no. 50 703 ... EUR
C490.32.R.02	32	2	11	32	110	40	5	SD.. 1205..	210,70 032
C490.32.R.03-12-B-40	32	3	11	32	101	40	5	SD.. 1205..	317,80 13200
C490.40.R.03	40	3	11	32	115	45	5	SD.. 1205..	248,50 040
C490.40.R.04-12-B32-50	40	4	11	32	112	50	5	SD.. 1205..	351,10 14000

MaxiMill – Shell mill A 490-12




Designation	DC	ZNF	APMX	DHUB	DCONMS	OAL	torque moment Nm	Insert	2B/40 Article no. 50 703 ... EUR
A490.40.R.04-12	40	4	11	38	16	40	5	SD.. 1205..	351,10 54000
A490.50.R.05-12	50	5	11	43	22	40	5	SD.. 1205..	389,90 550
A490.63.R.06-12	63	6	11	48	22	40	5	SD.. 1205..	428,90 563
A490.80.R.07-12	80	7	11	58	27	50	5	SD.. 1205..	592,30 580
A490.100.R.08-12	100	8	11	75	32	50	5	SD.. 1205..	650,60 600
A490.125.R.10-12	125	10	11	88	40	63	5	SD.. 1205..	697,30 625

Spare parts
DC


	Y7	Y7	Y7	2A/28	2A/28	2A	Y7
	TORX® blade	Clamping key – T	Key D	Power Screw	Molykote	Clamping screw	Torque screwdriver
Article no.	80 950 ...	80 397 ...	80 950 ...	70 950 ...	70 950 ...	70 950 ...	80 950 ...
EUR	4,76	3,91	9,95	12,48	4,38	2,52	131,90
32 - 40	037		114		303	280	193
50 - 125	037	040	114	151	303	280	193

Adjustable single angle milling cutter with threaded shank G 4500

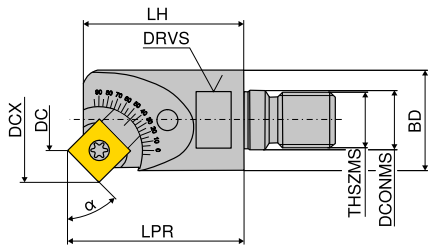

Designation	DC	DCX	ZNF	LPR	THSZMS	DCONMS	LH	BD	DRVS	torque moment Nm	Insert	2B Article no. 55 210 ... EUR 177,20 020	
G4500.20.R.01	7,1 - 31,0	30,5 - 35,45	1	48 - 50	M16	17	46	28,5	24	5	SD.. 1205..		

Adjustable single angle milling cutter C 4500

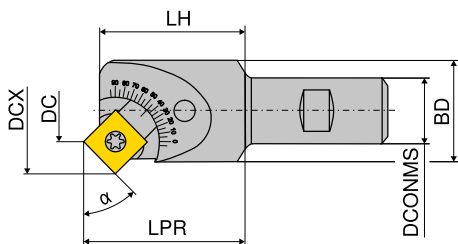


Designation	DC	DCX	ZNF	LPR	DCONMS	LH	BD	torque moment Nm	Insert	B 2B Article no. 50 668 ... EUR 159,40 020	
C4500.20.R.01	3,7 - 27,8	27,3 - 32,2	1	35,9 - 40,5	20	37	25	5	SD.. 1205..		

Spare parts

Insert	2A Cylindrical screw Article no. 70 950 ... EUR 4,29 706	2A Adjustment wedge Article no. 70 950 ... EUR 13,94 705	Y7 TORX® blade Article no. 80 950 ... EUR 4,76 037	Y7 Key D Article no. 80 950 ... EUR 9,95 114	2A/28 Molykote Article no. 70 950 ... EUR 4,38 303	2A Clamping screw Article no. 70 950 ... EUR 2,52 280	Y7 Torque screwdriver Article no. 80 950 ... EUR 131,90 193
SD.. 1205..							

SDHW / SDMT / SDHT


Designation	IC	D1	L	BS	S
	mm	mm	mm	mm	mm
SDH. 120508..	12,7	5,5	12,7	2,2	5,00
SDHT 120512..	12,7	5,5	12,7	1,8	5,00
SDHT 120520..	12,7	5,5	12,7	1,0	5,00
SDHT 120525..	12,7	5,5	12,7	1,5	5,00
SDMT 120508..	12,7	5,5	12,7	3,0	5,00
SDMT 1205ZZ..	12,7	5,5	12,7	0,9	5,00



SDHW / SDMT / SDHT

		TCM10	-29 CTCP230	-29 CTPP235	-29 CTPM240	-33 CTPM240	-F50 CTPM245
		CWC10	-29 DCX1230	-29 DPX1235	-29 DPX2240	-33 DPX2240	-F50 DPX2245
			DRAGONSKIN	DRAGONSKIN	DRAGONSKIN	DRAGONSKIN	DRAGONSKIN
							
		CERMET SDHW	SDMT	SDMT	SDMT	SDHT	SDMT
ISO	RE	Article no. 50 428 ... EUR	Article no. 51 081 ... EUR	Article no. 51 081 ... EUR	Article no. 51 081 ... EUR	Article no. 51 028 ... EUR	Article no. 51 110 ... EUR
	mm						
120508ER	0,8						
120508SR	0,8	18,75 901					18,43 458
120512SR	1,2						
120520SR	2,0					18,27 412	
1205ZZSN	0,8		15,76 020	15,76 120	15,26 420	18,27 421	
Steel		●	●	●	○	○	●
Stainless steel		●	○	○	●	●	●
Cast iron		○					
Non ferrous metals							
Heat resistant alloys							
hardened materials							

SDMT / SDHT

		-31 CTCK215		-27P H216T		-27P AMZ		-M31 CTC5240		-F50 CTCS245	
		-31 DCX3215		-ALP CWK26		-ALP AMZ		-M31 HC5240		-M31 HC5240	
		DRAGONSKIN		DRAGONSKIN		DRAGONSKIN		DRAGONSKIN		DRAGONSKIN	
											
		SDMT 1B/61		SDHT 1A/90		SDHT 1A/90		SDMT 1H/D4		SDMT 1H/D4 NEW	
ISO	RE	Article no. 51 059 ...		Article no. 50 426 ...		Article no. 50 426 ...		Article no. 50 580 ...		Article no. 51 110 ...	
	mm	EUR		EUR		EUR		EUR		EUR	
120508ER	0,8										
120508FR	0,8			18,27 555		22,64 655		18,43 508		18,43 55800	
120525FR	2,5			18,27 559							
1205ZZSN	0,8	15,26 521									
Steel		○									
Stainless steel											
Cast iron		●									
Non ferrous metals		●									
Heat resistant alloys		●									
hardened materials		●									

Milling guide

Machining strategy	→ 158+186	ISO Designation System	→ 194+195
Grade description	→ 209+210	Cutting data approximate values	→ 158+186
Starting Parameter	→ 158		

System MaxiMill 490-09

Cutting data recommendations/Technology data

for standard inserts

Material	F			M			R		
	v_c m/min	f_z mm	a_p mm	v_c m/min	f_z mm	a_p mm	v_c m/min	f_z mm	a_p mm
Steel	50-350	0,05-0,25	7,3	50-350	0,05-0,3	7,3	50-270	0,1-0,3	7,3
Stainless steel	130-280	0,1-0,2	7,3	60-280	0,1-0,2	7,3	60-280	0,1-0,2	7,3
Cast iron	100-360	0,05-0,25	7,3	100-360	0,05-0,3	7,3	100-360	0,1-0,3	7,3
Non-ferrous metals	160-1500	0,08-0,35	7,3	160-1500	0,08-0,35	7,3	160-1500	0,08-0,35	7,3
Heat resistant alloys	25-75	0,1-0,2	7,3	25-75	0,1-0,2	7,3	25-75	0,1-0,2	7,3
hardened materials									

Detailed information on cutting speed for each grade can be found on → page 138+139

Machining strategy


i System MaxiMill 490-09 is not suitable for plunging!

Starting Parameter

Example materials			
Steel	1000 N/mm ²	1.15	1.2312
Stainless steel	600 N/mm ²	2.6	1.4571
Cast iron	180 HB	3.1	EN-GJL-250
Heat resistant alloys	1450 N/mm ²	5.8	Inconel 625
			40CrMnMoS 8-6
			X6CrNiMoTi 1712 2
			EN-GJL-250 (GG25)
			Inconel 718



SDNT 09


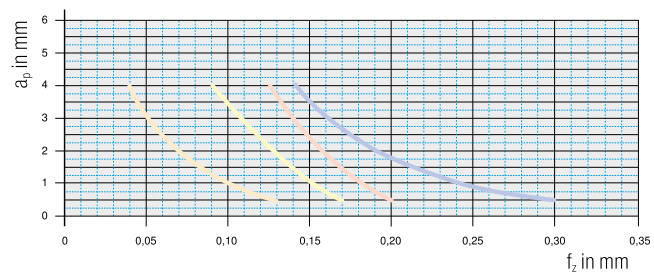


Material		Inserts		v_c in m/min	Coolant
Steel	1.2312	SDNT09T308SR-29	CTPP235 (DPX1235)	200	Dry
Stainless steel	1.4571	SDNT09T308SR-33	CTPM240 (DPX2240)	180	Dry
Cast iron	5.1301	SDNT09T308SR-31	CTCK215 (DCX3215)	250	Dry
Heat resistant alloys	2.4856	SDNT09T308ER-M31	CTC5240 (HCF5240)	35	Emulsion

Correction of the tooth load f_z

for System 211-07/-11/-15/-20 and 490-09/-12

i These values apply to an engagement width (a_e) below 50 %!

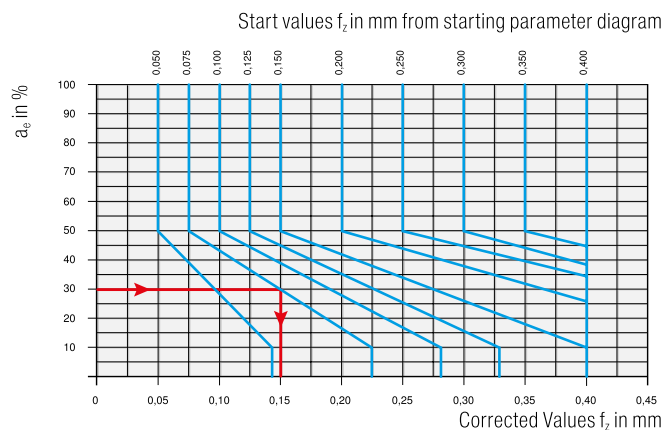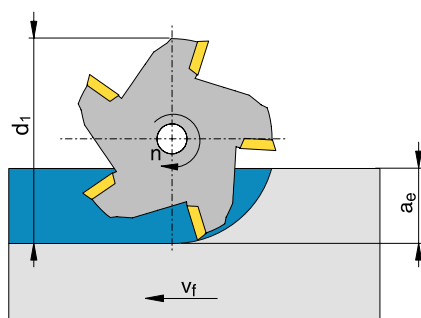

→ **Example:**
Start value (f_z) = 0.075 mm
 a_e = 30 %
corrected value (f_z) = 0.15 mm

System MaxiMill 490-12

Cutting data approximate values


for standard inserts

Material	F			M			R		
	v_c m/min	f_z mm	a_p mm	v_c m/min	f_z mm	a_p mm	v_c m/min	f_z mm	a_p mm
Steel	50-350	0,05-0,25	10,7	50-350	0,05-0,3	10,7	50-270	0,1-0,3	10,7
Stainless steel	130-280	0,1-0,2	10,7	60-280	0,1-0,2	10,7	60-280	0,1-0,2	10,7
Cast iron	100-360	0,05-0,25	10,7	100-360	0,05-0,3	10,7	100-360	0,1-0,3	10,7
Non-ferrous metals	160-1500	0,08-0,35	10,7	160-1500	0,08-0,35	10,7	160-1500	0,08-0,35	10,7
Heat resistant alloys	25-75	0,1-0,2	10,7	25-75	0,1-0,2	10,7	25-75	0,1-0,2	10,7
hardened materials									

Detailed information on cutting speed for each grade can be found on → page 138+139


Machining strategy

Helical plunge milling (without start hole)

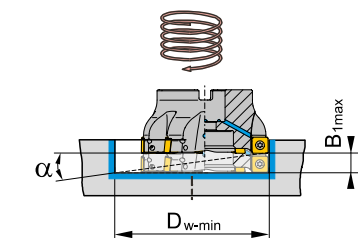

$$B = (D_w - DC) \times \pi \times \tan \alpha$$

D_w = Diameter of bore to be produced
 DC = Nominal diameter of milling cutter
 B = Depth of cut calculated for 360° helical movement

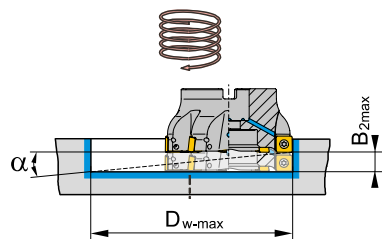


DC mm	D_{w-min} mm	B_{1max} mm	D_{w-max} mm	B_{2max} mm	α °
50	77	2,5	98	4,8	2,0
63	103	1,8	124	3,0	1,0
80	137	2,1	158	3,0	0,8
100	177	2,1	198	2,9	0,6
125	227	1,8	248	2,4	0,4

Starting Parameter

Example materials				
Steel	1000 N/mm ²	1.15	1.2312	40CrMnMoS 8-6
Stainless steel	600 N/mm ²	2.6	1.4571	X6CrNiMoTi 1712 2
Cast iron	180 HB	3.1	EN-GJL-250	EN-GJL-250 (GG25)
Heat resistant alloys	1450 N/mm ²	5.8	Inconel 625	Inconel 718



SDMT 12

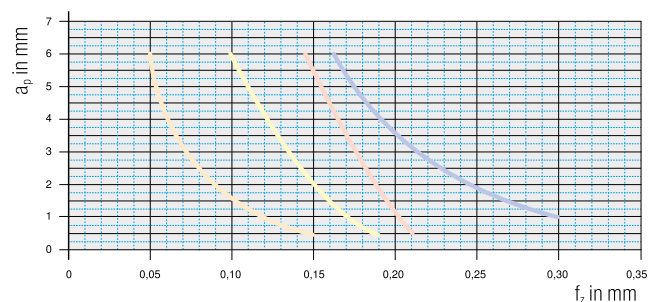

Material		Inserts		v_c in m/min	Coolant
Steel	1.2312	SDMT1205ZZSN-29	CTPP235 (DPX1235)	200	Dry
Stainless steel	1.4571	SDMT120512SR-33	CTPM240 (DPX2240)	180	Dry
Cast iron	5.1301	SDMT1205ZZSN-31	CTCK215 (DCX3215)	250	Dry
Heat resistant alloys	2.4856	SDMT120508ER-M31	CTC5240 (HCF5240)	35	Emulsion