


Short drill chuck

- ▲ Independent of direction of rotation
- ▲ Torque Moment = 12 Nm

Scope of supply:

Toolholder including clamping key SW4

NC
2010

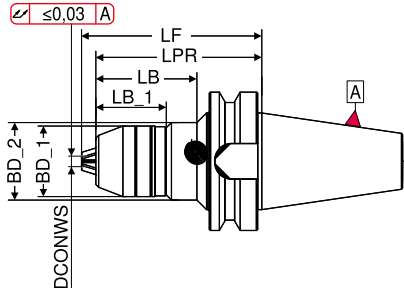

Adapter	DCONWS	BD_1	BD_2	LB_1	LB	LPR	LF	 A		 AD		 AD/B	
								G 6,3 n _{max} 10000	Y8	G 6,3 n _{max} 10000	Y8	G 6,3 n _{max} 10000	Y8
	mm	mm	mm	mm	mm	mm	mm	Article no.	84 509 ...	Article no.	84 510 ...	Article no.	84 511 ...
								EUR		EUR		EUR	
BT 40	0,5 - 13	48,5		50,9		80	89,0	216,00	413	219,20	413		
BT 40	0,5 - 13	48,5		50,9		90	99,0					248,50	413
BT 40	2,5 - 16	51,0		50,9		80	90,5	221,20	416	238,00	416		
BT 50	2,5 - 16	51,0	56	50,9	73	120	130,5	293,60	516	315,60	516		

Accessories

	
Pull studs	Others
→ 91-92	→ 17 34

i Can be used with G 2.5 to 30,000 1/min by subsequent balancing !