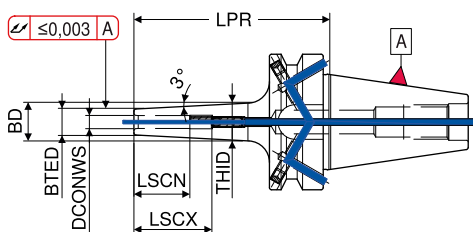


Shrink adapter, Slim 3°

▲ For solid carbide and HSS shanks to h6 tolerance or better

TG

AD/B
G 2,5 n_{max} 25000
Y8Article no.
84 323 ...

EUR

	Adapter	DCONWS	LPR	BTED	BD	LSCX	LSCN	THID		
		mm	mm	mm	mm	mm	mm			
short	BT 40	3	90	9	15	28	12	M6	160,40	103
	BT 40	4	90	10	16	28	16	M6	156,20	104
	BT 40	5	90	11	17	30	20	M6	156,20	105
	BT 40	6	90	12	18	36	26	M5	138,40	106
	BT 40	8	90	14	20	36	26	M6	138,40	108
	BT 40	10	90	16	22	41	31	M8x1	138,40	110
	BT 40	12	90	18	24	47	37	M10x1	138,40	112
	BT 40	14	90	20	26	47	37	M10x1	138,40	114
	BT 40	16	90	22	28	50	40	M12x1	138,40	116
	BT 40	18	90	24	30	50	40	M12x1	138,40	118
	BT 40	20	90	26	32	52	42	M16x1	138,40	120
long	BT 40	3	120	9	16	12	12		179,40	203
	BT 40	4	120	10	17	16	16		176,20	204
	BT 40	5	120	11	18	20	20		176,20	205
	BT 40	6	120	12	21	36	26	M5	157,30	206
	BT 40	8	120	14	23	36	26	M6	157,30	208
	BT 40	10	120	16	25	41	31	M8x1	157,30	210
	BT 40	12	120	18	27	47	37	M10x1	157,30	212
	BT 40	14	120	20	29	47	37	M10x1	157,30	214
	BT 40	16	120	22	31	50	40	M12x1	157,30	216
	BT 40	18	120	24	33	50	40	M12x1	157,30	218
	BT 40	20	120	26	35	52	42	M16x1	157,30	220
extra-long	BT 40	3	160	9	19	12	12		202,40	303
	BT 40	4	160	10	20	16	16		198,20	304
	BT 40	5	160	11	21	20	20		198,20	305
	BT 40	6	160	12	24	36	26	M5	180,40	306
	BT 40	8	160	14	26	36	26	M6	180,40	308
	BT 40	10	160	16	28	41	31	M8x1	180,40	310
	BT 40	12	160	18	30	47	37	M10x1	180,40	312
	BT 40	14	160	20	32	47	37	M10x1	180,40	314
	BT 40	16	160	22	34	50	40	M12x1	180,40	316
	BT 40	18	160	24	36	50	40	M12x1	180,40	318
	BT 40	20	160	26	38	52	42	M16x1	180,40	320

→ Min. clamping depth, Page 233

Y7



Stop screw IK

Article no.
83 950 ...

EUR

8,11 417

Y7



Stop screw IK

Article no.
83 950 ...

EUR

8,11 418


Spare parts
DCONWS

3 - 5	M6x14 - SW2	8,11	417	M5x12,5 - SW2,5	8,11	418
6				M6x12,5 - SW3	8,11	419
8				M8x1x13,5 - SW3	8,11	420
10				M10x1x13,5 - SW5	8,11	421
12 - 14				M12x1x13,5 - SW5	8,11	422
16 - 18				M16x1x13,5 - SW8	9,34	424
20						

Shrink fit adapters 4.5°

▲ For solid carbide and HSS shanks to h6 tolerance or better

TG

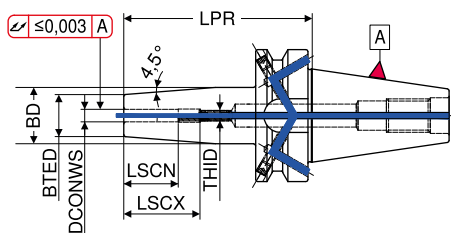AD/B
G 2,5 n_{max} 25000AD
G 2,5 n_{max} 25000

	Adapter	DCONWS	LPR	BTED	BD	LSCX	LSCN	THID			
		mm	mm	mm	mm	mm	mm				
Short	BT 30	3	85	10	17	28	12	M6			
	BT 30	4	85	15	22	28	16	M6			
	BT 30	5	85	15	22	30	20	M6			
	BT 30	6	85	21	27	36	26	M5			
	BT 30	8	85	21	27	36	26	M6			
	BT 30	10	85	24	32	41	31	M8x1			
	BT 30	12	85	24	32	47	37	M10x1			
	BT 30	14	85	27	34	47	37	M10x1			
	BT 30	16	85	27	34	50	40	M12x1			
	BT 30	18	85	33	42	50	40	M12x1			
	BT 30	20	85	33	42	52	42	M16x1			
	BT 40	3	90	10	17	28	12	M6	142,60	103	
	BT 40	4	90	15	22	28	16	M6	137,40	104	
	BT 40	5	90	15	22	30	20	M6	137,40	105	
	BT 40	6	90	21	27	36	26	M5	122,70	106	
	BT 40	8	90	21	27	36	26	M6	122,70	108	
	BT 40	10	90	24	32	41	31	M8x1	122,70	110	
	BT 40	12	90	24	32	47	37	M10x1	122,70	112	
	BT 40	14	90	27	34	47	37	M10x1	122,70	114	
	BT 40	16	90	27	34	50	40	M12x1	122,70	116	
	BT 40	18	90	33	42	50	40	M12x1	122,70	118	
Long	BT 40	20	90	33	42	52	42	M16x1	122,70	120	
	BT 40	25	100	44	53	58	48	M16x1	122,70	125	
	BT 40	3	120	10	20	12	12		158,40	203	
	BT 40	4	120	15	22	16	16		155,20	204	
	BT 40	5	120	15	22	20	20		155,20	205	
	BT 40	6	120	21	27	36	26	M5	137,40	206	
	BT 40	8	120	21	27	36	26	M6	137,40	208	
	BT 40	10	120	24	32	41	31	M8x1	137,40	210	
	BT 40	12	120	24	32	47	37	M10x1	137,40	212	
	BT 40	14	120	27	34	47	37	M10x1	137,40	214	
Extra-long	BT 40	16	120	27	34	50	40	M12x1	137,40	216	
	BT 40	18	120	33	42	50	40	M12x1	137,40	218	
	BT 40	20	120	33	42	52	42	M16x1	137,40	220	
	BT 40	25	120	44	53	58	48	M16x1	137,40	225	
	BT 40	3	160	10	20	12	12		180,40	303	
	BT 40	4	160	15	22	16	16		176,20	304	
	BT 40	5	160	15	22	20	20		176,20	305	
	BT 40	6	160	21	27	36	26	M5	159,40	306	
	BT 40	8	160	21	27	36	26	M6	159,40	308	
	BT 40	10	160	24	32	41	31	M8x1	159,40	310	

→ Min. clamping depth, Page 233

Spare parts
DCONWS3 - 5
6
8
10
12 - 14
16 - 18
20 - 25

M6x14 - SW2

Article no.
83 950 ...
EUR

8,11 417

Article no.
83 950 ...
EURM5x12,5 - SW2,5 8,11 418
M6x12,5 - SW3 8,11 419
M8x1x13,5 - SW3 8,11 420
M10x1x13,5 - SW5 8,11 421
M12x1x13,5 - SW5 8,11 422
M16x1x13,5 - SW8 9,34 424