


High pressure chuck, short and stable version

▲ For solid carbide and HSS shanks with h6 tolerance or better

Scope of supply:

Base body with backstop screw and pressure screw

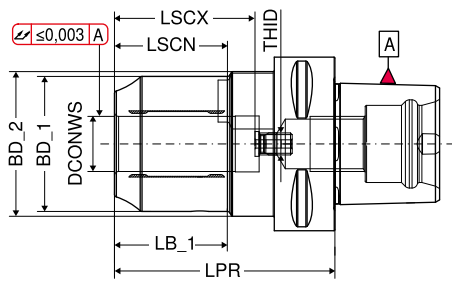

AD
G 2,5 n_{max} 25000

Y8

Article no.
84 108 ...

EUR
394,90 62000


Adapter	DCONWS	LPR	LB_1	BD_1	BD_2	LSCX	LSCN	THID
	mm	mm	mm	mm	mm	mm	mm	
PSC 63	20	80	41	49	52,5	51	41	M8x1

→ Min. clamping depth, Page 233

i LSCX = Maximum insertion depth
LSCN = Minimum insertion depth




Cylindrical screw



Clamping key – T



Pressure screw



Stop screw IK

Spare parts

for Article no.

84 108 62000

M5x5 - SW2,5

Article no.
83 950 ...
EUR 1,85 157

SW5

Article no.
80 397 ...
EUR 4,24 050

M10x1x14

Article no.
83 950 ...
EUR 4,28 429

M16x1x13,5 - SW8

Article no.
83 950 ...
EUR 9,34 424

Accessories



Reduction sleeve

→ 17|32



Coolant transfer pipe

→ 173



Others

→ 17|34