


Shrink adapters

▲ For solid carbide and HSS shanks with h6 tolerance or better

Scope of supply:

Holder **without** IK back stop screw

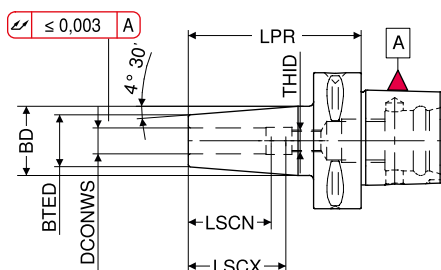

	Adapter	LPR	DCONWS	BTED	BD	LSCX	LSCN	THID			
									AD	AD	AD
									G 6,3 n _{max} 15000	G 6,3 n _{max} 15000	G 6,3 n _{max} 15000
									Y8	Y8	Y8
									Article no.	Article no.	Article no.
									84 104 ...	84 105 ...	84 106 ...
									EUR	EUR	EUR
extra-long	PSC 63	160	6	21	32	36	26	M5			279,00 606
	PSC 63	160	8	21	32	36	26	M6			279,00 608
	PSC 63	160	10	24	34	41	31	M8x1			279,00 610
	PSC 63	160	12	24	34	47	37	M10x1			279,00 612
	PSC 63	160	14	27	36	47	37	M10x1			279,00 614
	PSC 63	160	16	27	36	50	40	M12x1			279,00 616
	PSC 63	160	18	33	44	50	40	M12x1			279,00 618
	PSC 63	160	20	33	44	52	42	M16x1			279,00 620
	PSC 63	160	25	44	53	58	48	M16x1			279,00 625
	PSC 63	160	32	44	53	61	51	M16x1			279,00 632
short	PSC 80	85	6	21	27	36	26	M5	230,70 806		
	PSC 80	85	8	21	27	36	26	M6	230,70 808		
	PSC 80	85	10	24	32	41	31	M8x1	230,70 810		
	PSC 80	85	12	24	32	47	37	M10x1	230,70 812		
	PSC 80	90	14	27	34	47	37	M10x1	230,70 814		
	PSC 80	90	16	27	34	50	40	M12x1	230,70 816		
	PSC 80	90	18	33	42	50	40	M12x1	230,70 818		
	PSC 80	90	20	33	42	52	42	M16x1	230,70 820		
	PSC 80	95	25	44	53	58	48	M16x1	230,70 825		
	PSC 80	100	32	44	53	61	51	M16x1	230,70 832		
long	PSC 80	120	6	21	32	36	26	M5		275,80 806	
	PSC 80	120	8	21	32	36	26	M6		275,80 808	
	PSC 80	120	10	24	34	41	31	M8x1		275,80 810	
	PSC 80	120	12	24	34	47	37	M10x1		275,80 812	
	PSC 80	120	14	27	36	47	37	M10x1		275,80 814	
	PSC 80	120	16	27	36	50	40	M12x1		275,80 816	
	PSC 80	120	18	33	44	50	40	M12x1		275,80 818	
	PSC 80	120	20	33	44	52	42	M16x1		275,80 820	
	PSC 80	120	25	44	53	58	48	M16x1		275,80 825	
	PSC 80	120	32	44	53	61	51	M16x1		275,80 832	

→ Min. clamping depth, Page 233

Spare parts DCONWS

6	8,29	140
8	8,29	141
10	8,29	142
12 - 14	8,29	143
16 - 18	8,29	144
20 - 32	8,29	145

