


Short drill chuck

- ▲ Independent of direction of rotation
- ▲ Torque Moment = 12 Nm

Scope of supply:

Toolholder including clamping key SW4

**NC
2010**

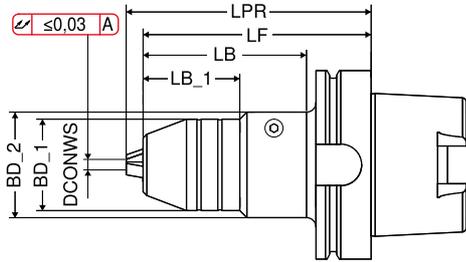

AD
G 6,3 n_{max} 10000
Y8

Adapter	DCONWS	BD_1	BD_2	LB_1	LB	LPR	LF	Article no.	
	mm	mm	mm	mm	mm	mm	mm	EUR	
HSK-A 63	0,5 - 13	48,5	56	50,9		116,9	126,0	286,30	613
HSK-A 63	2,5 - 16	51,0	56	50,9		116,9	127,5	291,50	616
HSK-A 100	0,5 - 13	48,5	56	50,9	86	120,0	129,0	350,30	113
HSK-A 100	2,5 - 16	51,0	56	50,9	86	120,0	130,5	365,90	116

i Can be used with G 2.5 to 30,000 1/min by subsequent balancing !

Accessories



Others

→ 17134