


Short drill chuck

- ▲ Independent of direction of rotation
- ▲ Torque Moment = 12 Nm

Scope of supply:

Toolholder including clamping key SW4


NC
2010

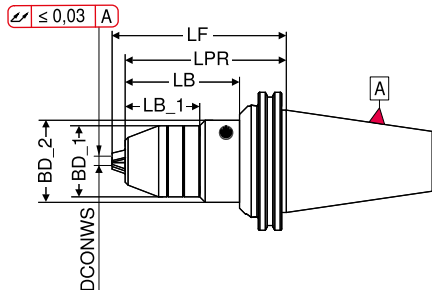

Adapter	DCONWS	LPR	BD_1	BD_2	LB_1	LB	LF	 A		 AD		 AD/B	
								G 6,3 n _{max} 10000	Y8	G 6,3 n _{max} 10000	Y8	G 6,3 n _{max} 10000	Y8
	mm	mm	mm	mm	mm	mm	mm	Article no.	EUR	Article no.	EUR	Article no.	EUR
SK 30	0,5 - 10	80	43,0			59,9	89,0	84 418 ...	270,50	313		84 420 ...	
SK 40	0,5 - 13	80	48,5			60,8	89,0	207,70	413	221,20	413	248,50	413
SK 40	0,5 - 13	80	48,5		50,9	60,0	89,0			241,20	416		
SK 40	2,5 - 16	80	51,0			60,8	90,5	221,20	416			262,20	416
SK 40	2,5 - 16	80	51,0		50,9		90,5						
SK 50	0,5 - 13	110	48,5	56	50,9	78,0	119,0			280,00	513		
SK 50	0,5 - 13	110	48,5	56	50,9	78,1	119,0	270,50	513	280,00	516		
SK 50	2,5 - 16	110	51,0	56	50,9	78,0	120,5						
SK 50	2,5 - 16	110	56,0		50,9	78,0	120,5	274,70	516				

i Can be used at G 2.5 to 30,000 1/min after additional balancing !

Accessories



Pull studs → 48-49
Others → 17/34