




N-POINT

Aplicação de performance em materiais
até 60HRC.




nissin

cutting tools • management • technology

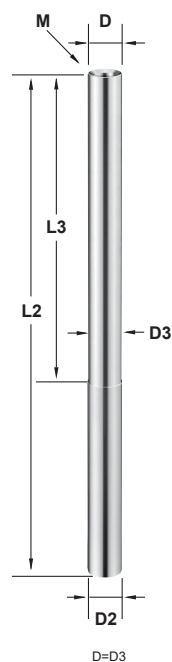

Haste Metal Duro


CÓDIGO NISSIN	DIÂMETRO D1	DIÂMETRO DA HASTE D2	ÁREA ÚTIL L3	COMPRIMENTO TOTAL L2	ROSCA M
7900.100	9.7	10	40	100	M5
7900.101	9.7	10	90	150	M5
7900.120	11.7	12	40	100	M6
7900.121	11.7	12	90	150	M6
7900.122	11.7	12	110	200	M6
7900.160	15.5	16	40	100	M8
7900.161	15.5	16	90	150	M8
7900.162	15.5	16	110	200	M8
7900.200	19.5	20	40	100	M10
7900.201	19.5	20	90	150	M10
7900.202	19.5	20	110	200	M10
7900.203	19.5	20	150	250	M10



Fresa Roscada Esférica



CÓDIGO NISSIN	DIÂMETRO D1	COMPRIMENTO DE CORTE L1	COMPRIMENTO TOTAL L2	ROSCA M
7920.100	10	10	32	M5
7920.120	12	12	40	M6
7920.160	16	16	48	M8
7920.200	20	20	55	M10



Fresa Roscada Toroidal



CÓDIGO NISSIN	DIÂMETRO D1	RAIO R	COMPRIMENTO DE CORTE L1	COMPRIMENTO TOTAL L2	ROSCA M
7930.105	10	0.5	10	32	M5
7930.101	10	1.0	10	32	M5
7930.125	12	0.5	12	40	M6
7930.121	12	1.0	12	40	M6
7930.165	16	0.5	16	48	M8
7930.161	16	1.0	16	48	M8
7930.201	20	1.0	20	55	M10
7930.202	20	2.0	20	55	M10